
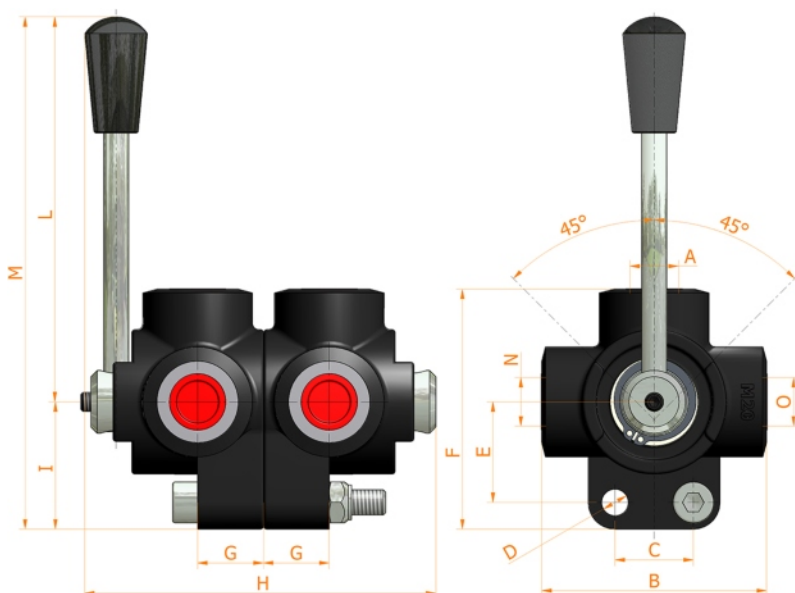
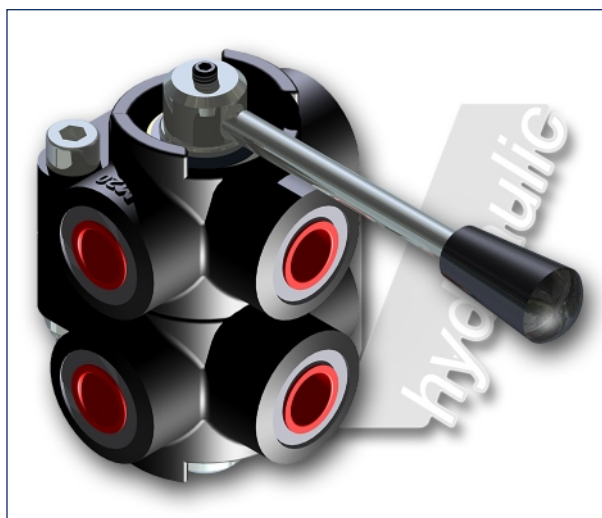


D6

6 Wege Drehschaltventil



Eigenschaften:

- Gusskoerper
- Verzinkte Aussenteile
- Standard Farbe: Schwarz

O-N-A GAS	FOERDER- LEISTUNG lt/min	DRUCK BAR	B mm	C mm	D mm	E mm	F mm	G mm	H mm	L mm	M mm	MASSE KG	MITTE OFFEN ARTIKEL NR.	MITTE GE- SCHLOSSEN ARTIKEL NR.
1/4"	60+60	350	70	25	8,5	32	75,5	21	112	115	155,5	1,500	7003.0104	7003.0111
3/8"	60+60	350	70	25	8,5	32	75,5	21	112	115	155,5	1,500	7003.0100	7003.0107
1/2"	60+90	350	80	32	8,5	36	86	24	124	115	161	2,300	7003.0101	7003.0108
3/4"	120+120	350	90	32	10,5	42	98,5	26	132	115	168,5	3,500	7003.0102	7003.0109
1"	200+200	300	98	32	10,5	50	110	31	152	115	176,5	5,300	7003.0103	7003.0110

HV Hydraulic S.r.l.

www.hvhydraulic.com - info@hvhydraulic.com

Via dell'Agricoltura, 162 - Loc. Castelletto di Serravalle - 40053 Valsamoggia (BO) Italien - Tel. +39 051 670.50.11 - Fax +39 051 670.53.74

© ALLE RECHTE VORBEHALTEN